

LT625 SLEEPER



Configuration: 125" BBC
Cab: 73" Sky-Rise Sleeper
Engine: International® A26 or Cummins® X15



- ▶ Regional to Long-Haul Applications
- ▶ Van, Flatbed and Specialty Haul
- ▶ Fleet or Owner Operator


The International® LT™ Series is the most driver-centric truck we've ever delivered. It's designed based on the input of hundreds of drivers, with a cab interior that delivers greater comfort, visibility and control over the long haul. The LT Series is the most aerodynamically efficient truck we've ever offered, with a choice of advanced powertrains and a host of uptime improvements that impact your bottom line mile after mile, year after year.





KEY FEATURES:

- ▶ Longer 125" BBC for improved aerodynamics and optimized weight distribution
- ▶ Reduced weight, improved aerodynamics and optimized drivetrains for huge fuel economy gains
- ▶ Door, side glass and mirror designs improve lateral visibility and reduce neck strain
- ▶ The dash is designed for the driver with controls and switch placement optimized by use
- ▶ Available premium gauge cluster designed with driver input is customizable with virtual gauges
- ▶ Bendix® Wingman® Fusion™ Collision Mitigation is standard on LT Series
- ▶ Easy-access column-mounted shifter integrated with engine braking helps keep hands on the wheel
- ▶ Industry-standard J1939 electrical system architecture and improved harnessing to maximize uptime
- ▶ The HVAC system is designed for reliability, now includes a high-performance MAX defrost feature
- ▶ Redesigned center console has been ergonomically-refined for improved sleeper access

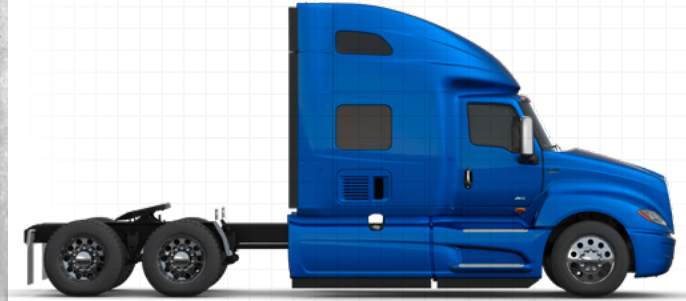

125" BBC SET-BACK FRONT AXLE

GVW

- ▶ 32,000 - 60,000 lbs.

Models/BBC/BA

- ▶ 125" BBC / 50" BA

Cab Configurations

- ▶ 56" Low Roof Sleeper
- ▶ 56" Hi-Rise Sleeper
- ▶ 73" Hi-Rise Sleeper
- ▶ 73" Sky-Rise Sleeper

Wheelbase Options

- ▶ 152 to 230" 4x2
- ▶ 173 to 256" 6x4

Axle Configurations

- ▶ 4x2, 6x2, 6x4

Rear Axle

- ▶ SINGLE REAR AXLE (4x2)
 - Meritor: 23,000 lbs.
 - Dana Spicer: 23,000 lbs.
- ▶ TANDEM REAR AXLE (6x4)
 - Meritor: 40,000 - 46,000 lbs.
 - Dana Spicer: 40,000 - 46,000 lbs.

Front Axle

- Hendrickson: 12,000 - 14,000 lbs.
- Dana Spicer: 12,000 - 14,000 lbs.
- Meritor: 12,000 - 14,000 lbs.

Frames

- ▶ Heat Treated Alloy Steel 120,000 PSI

Front Suspension

- ▶ Spring Monoleaf: 12,000 - 13,200 lbs.
- ▶ Parabolic Taperleaf: 12,000 - 14,000 lbs.

Rear Suspension

- ▶ AIR SINGLE
 - International®: 20,000 lbs.
 - International: 23,500 lbs. Vari-rate spring
- ▶ AIR TANDEM
 - International: 40,000 lbs.
 - Hendrickson: HTB 40,000 lbs.
 - Hendrickson: HAS 46,000 lbs.

Electrical System

- ▶ ALTERNATORS
 - Leece-Neville: 12 Volt, 160, 210, 240, 325 Amp
 - Delco Remy: 12 Volt, 165, 200, 300 Amp
- ▶ BATTERY SYSTEMS
 - International: 12 Volt 1950 - 3700 CCA
 - Fleetrite®: 12 Volt 3300 - 9200 CCA
 - JCI: 12 Volt 2250 - 3000 CCA
 - Deka: 12 Volt 2800 CCA
 - EnerSys Odyssey: 12 Volt 3450 - 4600 CCA
 - NorthStar: 12 Volt 4600-9200 CCA

Exhaust System

- ▶ Single Canister After Treatment Device, Frame Mounted Right Side Under Cab
- ▶ Horizontal, Vertical, or Dual B Pillar Exhaust

Brakes

- ▶ Air Drum Brakes with ABS with Optional Automatic Traction Control and Electronic Stability Control
- ▶ Air Disc Brakes with Automatic Traction Control, and Electronic Stability Control

Power Steering

- ▶ Sheppard
- ▶ TRW

Engines

- ▶ International® A26: 400 - 475 hp and 1,450 - 1,750 lb.-ft.
- ▶ Cummins® X15: 400 - 565 hp and 1,450 - 2,050 lb.-ft.

Transmissions

- ▶ Automated Manual Transmissions
 - Eaton Endurant: 11, 12 speed
 - Eaton Fuller UltraShift PLUS: 13, 18 speed
 - Eaton Fuller UltraShift PLUS LSE: 16 speed
 - Eaton Fuller Advantage: 10 speed
- ▶ Manual Transmissions
 - Eaton Fuller Advantage: 10 speed
 - Eaton Fuller: 10 speed
 - Fuller: 9, 10, 13, 18 speed

Fuel Tanks

- ▶ 70 - 120 Gallon, Dual, Non-Polished or Polished Aluminum, Mounted Back of Cab
- ▶ 70 - 140 Gallon, Single, Non-Polished or Polished Aluminum, Mounted Back of Cab

Tires

- ▶ Continental, Michelin, Bridgestone, Goodyear

Note: The information and conclusions contained herein are believed to be correct at time of publication, but do not necessarily apply to similar vehicles with different specifications or with production dates after the production of this publication. Vehicles with different specifications or later dates of production may yield different results. Vehicle specifications are subject to change without notice. TAD16011 01/2019 ©2019 NAVISTAR Inc. All rights reserved. All marks are trademarks of their respective owners.